



V-S Led-tukku Oy - LN-115-Z-12V



IP rate IP20



Dimensions & available lengths

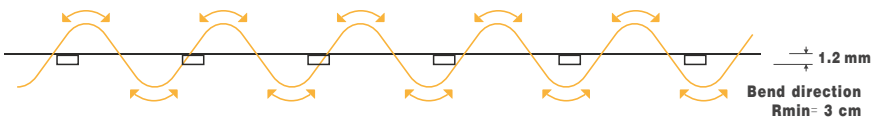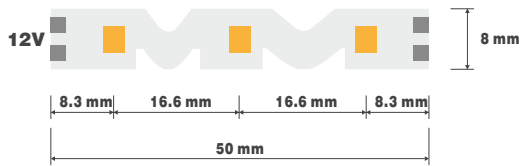


Electrical & Output Data

Model No.	LN-115-Z-12V
Step length (mm/x LED)	50mm / 3LEDs
Number LED/m	60
Voltage (v)	12 V
Ra	80
Beam Angle(°)	120
Power (w/m)	11.5
FPC width (mm)	8
Max. length per circuit (m)	5
IP rate	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Illuminance Distribution



Light efficiency & Lumen Output

Luminaire efficacy (3000K)	90lm/W @Ra80
LED color	Ra80
3000K	1037lm
4000K	1114lm