



V-S Led-tukku Oy - LN-115




Illuminance Distribution



Dimensions & available lengths

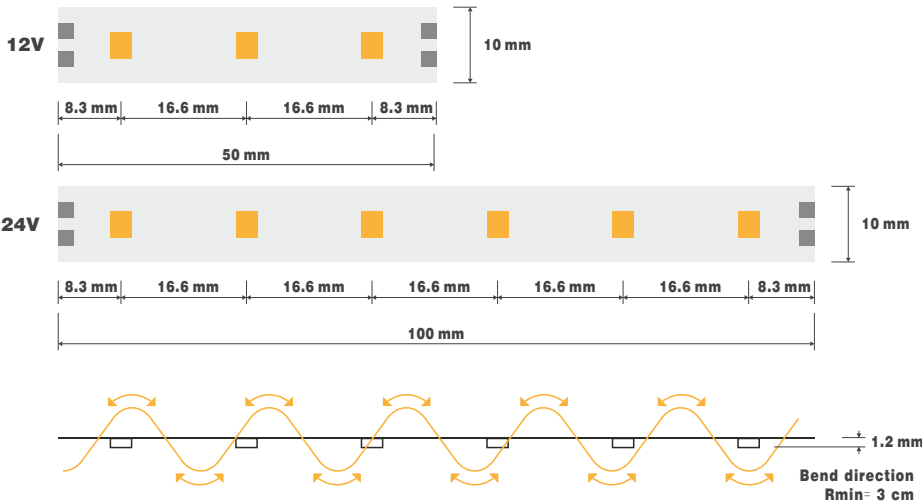

Aluminum Profiles

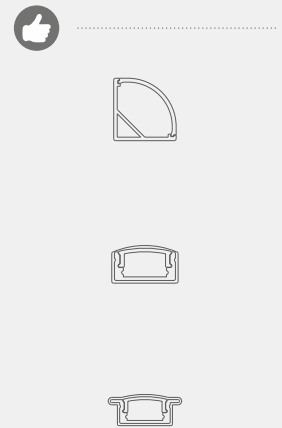

Electrical & Output Data

Model No.	LN-115-12V	LN-115-24V
Step length (mm/x LED)	50mm / 3LEDs	100mm / 6LEDs
Number LED/m	60	60
Voltage (v)	12 V	24 V
Ra	80	80
Beam Angle(°)	120	120
Power (w/m)	11.52	11.52
FPC width (mm)	10	10
Max. length per circuit (m)	5	5
IP rate	20/65	20/65
Installation	3M Tape / Mounting Clips / Aluminum Profiles	

Light efficiency & Lumen Output

Luminaire efficacy (3000K)	90lm/W @Ra80
LED color	Ra80
3000K	1078lm
4000K	1114lm

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.