


## Metal Touch Sensor Dimmer

Model: SR-2402 series

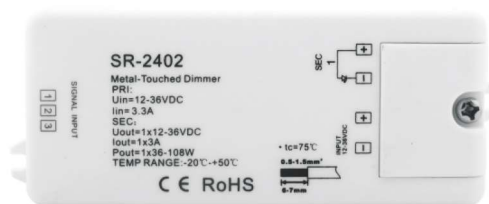


### Feature

- Touch sensitivity can be adjusted according to different applications.
- High stable and reliable sensor head.
- Smooth adjustment without any flash.
- 4 brightness levels for Metal-Touch Dimmer.


### Parameter

Part No.	Input Voltage	Current	Output	Remarks 1	Remarks 2
SR-2402	12-36VDC	1x8A	1x(96-288)W	Constant voltage	Dim & Switch
SR-2404	12-36VDC	1x0.35A	1x(4.2-12.6)W	Constant current	Dim & Switch
SR-2406	12-36VDC	1x0.7A	1x(8.4-25.2)W	Constant current	Dim & Switch
SR-2402B	12-36VDC	1x8A	1x(96-288)W	Constant voltage	only Switch
SR-2404B	12-36VDC	1x0.35A	1x(4.2-12.6)W	Constant current	only Switch
SR-2406B	12-36VDC	1x0.7A	1x(8.4-25.2)W	Constant current	only Switch


### Product Size

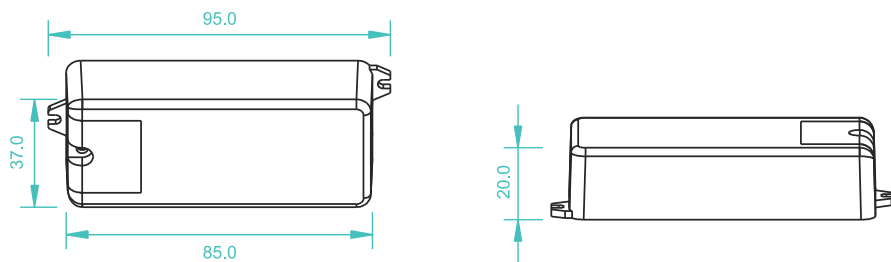

### Brief introduction of buttons

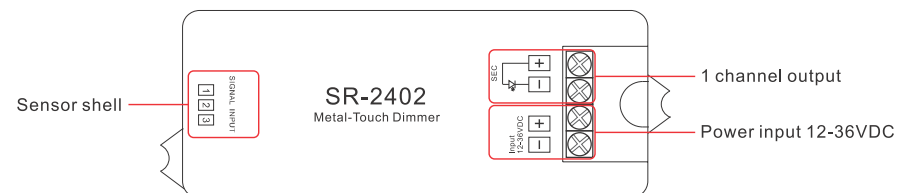

### Wiring diagram

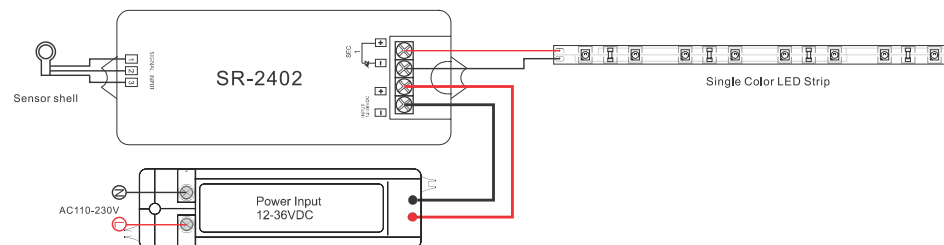

### Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

### Warranty Agreement

- 1) We provide lifelong technical assistance with this product:
  - 5-year warranty. We print date on every products, for example : 1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
  - For faults beyond the 3-year warranty we reserve the right to charge for time and parts.
- 2) Limited Warranty
  - Any defects caused by wrong operation.
  - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
  - Any damages due to transportation, vibration etc. after purchase.
  - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
  - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
  - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.