



V-S Led-tukku Oy - LN-128-12V

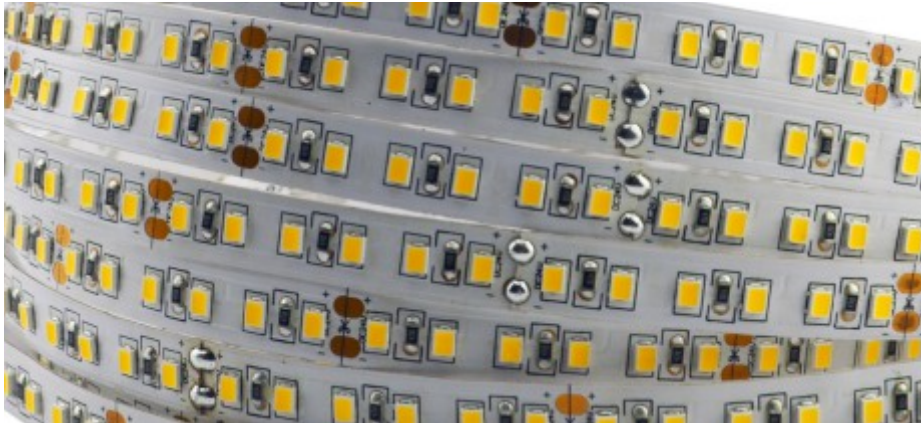



Illuminance Distribution



IP rate IP20

DC 12/24V
CE
UL
1 BIN
Dimmable
LM 80
Ra 80
120°
3 years

Dimensions & available lengths

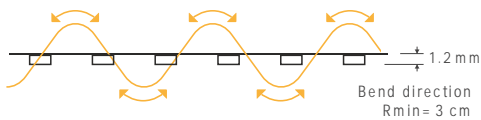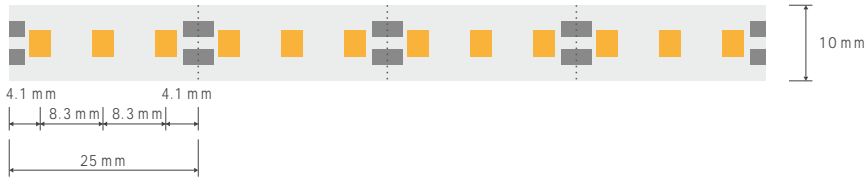

Electrical & Output Data

Model No.	LN-128-12V
Step length (mm/x LED)	25mm / 3LEDs
Number LED/m	120
Voltage (v)	12 V
Ra	80
Beam Angle(°)	120
Power (w/m)	12.8
FPC width (mm)	10
Max. length per circuit (m)	2.5
IP rate	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Aluminum Profiles



Light efficiency & Lumen Output

Luminaire efficacy (3000K) 95lm/W @ Ra80

LED color Ra80

3000K 1216lm

4000K 1307lm