



V-S Led-tukku Oy - LN-128-24V

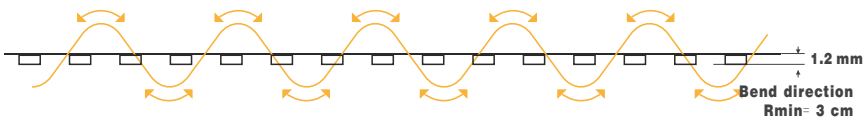

Dimensions & available lengths

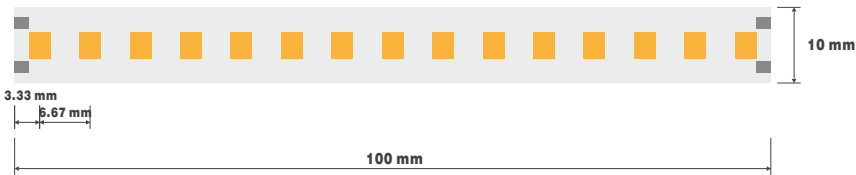


Electrical & Output Data

Model No.	LN-128-24V
Step length (mm/x LED)	100mm/12LEDs
Number LED/m	120
Voltage (v)	24 V
Ra	80
Beam Angle(°)	120
Power (w/m)	12.8
FPC width (mm)	10
Max. length per circuit (m)	10
IP rate	20/65
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.



Illuminance Distribution

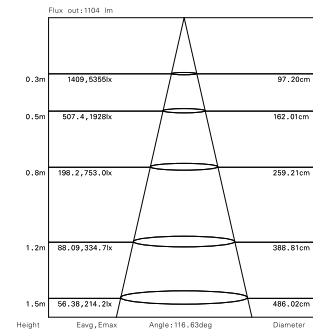

Aluminum Profiles



Light efficiency & Lumen Output

Luminaire efficacy (3000K) **97lm/W @Ra80**

LED color **Ra80**

3000K 1240lm

4000K 1333lm