


V-S Led-tukku Oy - LN-12COB-IP65





IP rate



Illuminance Distribution



Dimensions & available lengths

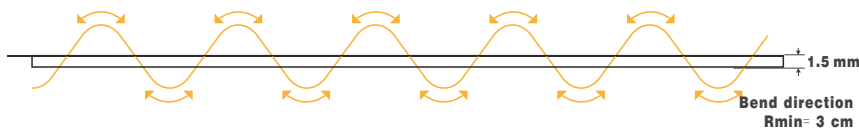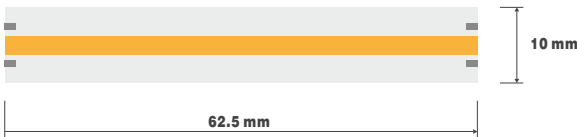

Electrical & Output Data

Model No.	LN-12COB-IP65
Step length (mm/x LED)	62.5mm / 32LEDs
Number LED/m	512
Voltage (v)	24 V
Ra	90
Beam Angle(°)	180
Power (w/m)	12
FPC width (mm)	10
Max. length per circuit (m)	5
IP rate	65
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Aluminum Profiles



Light efficiency & Lumen Output

Luminaire efficacy (3000K)	91lm/W @Ra90
LED color	Ra90
3000K	908lm
4000K	989lm