


V-S Led-tukku Oy - LN-15





IP rate IP20




Illuminance Distribution



Dimensions & available lengths

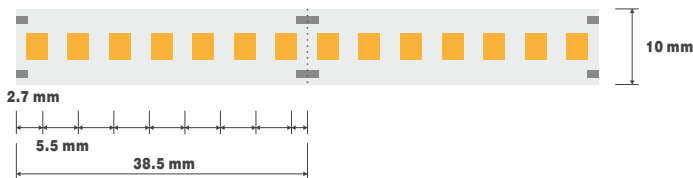

Aluminum Profiles

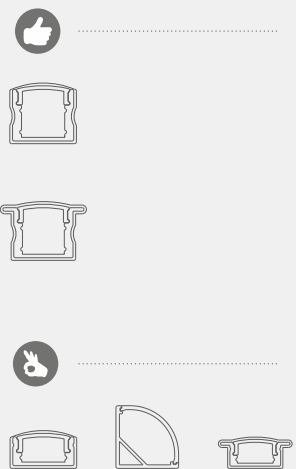

Electrical & Output Data

Model No.	LN-15
Step length (mm/x LED)	38.5mm/7LEDs
Number LED/m	182
Voltage (v)	24 V
Ra	80
Beam Angle(°)	120
Power (w/m)	15
FPC width (mm)	10
Max. length per circuit (m)	5
IP rate	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Light efficiency & Lumen Output

Luminaire efficacy (3000K) **115lm/W @Ra80**

LED color

3000K 1725lm

4000K 1854lm