



V-S Led-tukku Oy - LN-172-RGBW




Illuminance Distribution



Dimensions & available lengths

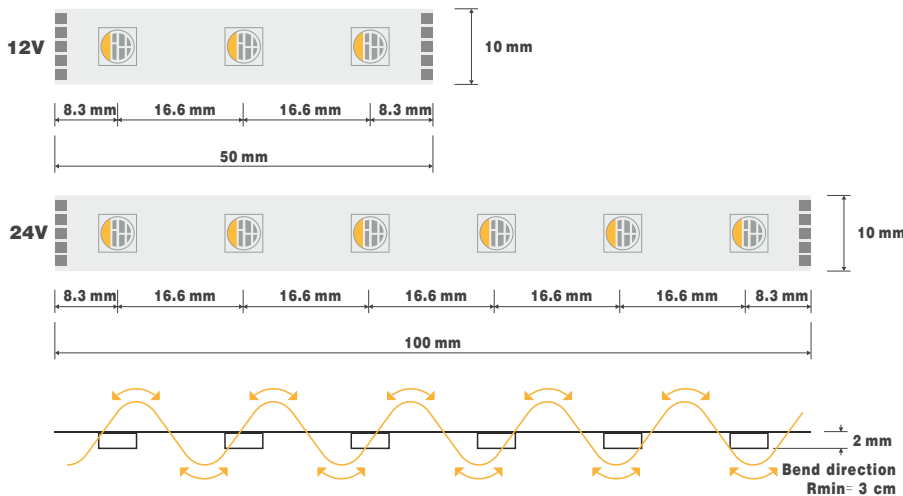

Aluminum Profiles



Electrical & Output Data

Model No.	LN-172-RGBW-12V	LN-172-RGBW-24V
Step length (mm/x LED)	50mm / 3LEDs	100mm / 6LEDs
Number LED/m	60	60
Voltage (v)	12 V	24 V
Ra	80	80
Beam Angle(°)	120	120
Power (w/m)	17.2	17.2
Lumen(lm/m)	716	716
FPC width (mm)	10	10
Max. length per circuit (m)	5	5
IP rate	20/65	20/65
Installation	3M Tape / Mounting Clips / Aluminum Profiles	

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.