

# V-S Led-tukku Oy - LN-192-24V




IP rate



IP20



## Illuminance Distribution



## Dimensions & available lengths

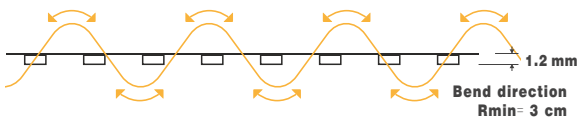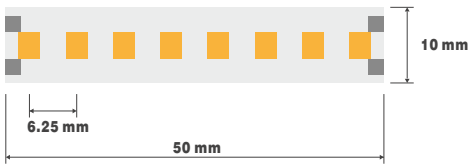

## Aluminum Profiles



## Electrical & Output Data

Model No.	LN-192-24V
Step length (mm/x LED)	50mm/8LEDs
Number LED/m	160
Voltage (v)	24 V
Ra	80
Beam Angle(°)	120
Power (w/m)	19.2
FPC width (mm)	10
Max. length per circuit (m)	5
IP rate	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

## Light efficiency & Lumen Output

Luminaire efficacy (4000K) **140lm/W @Ra80**

LED color **Ra80**

**3000K** 2500lm

**4000K** 2688lm