


V-S Led-tukku Oy - LN-22-3K6K




IP rate IP20




Illuminance Distribution



Dimensions & available lengths

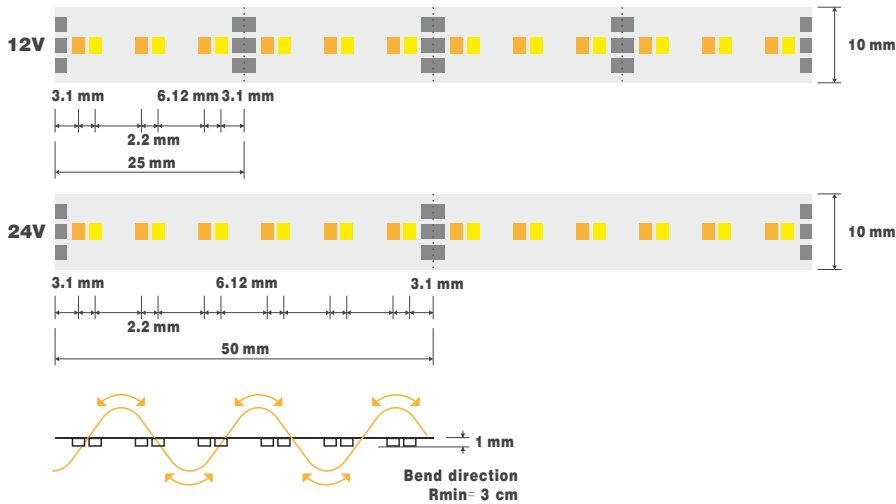

Aluminum Profiles

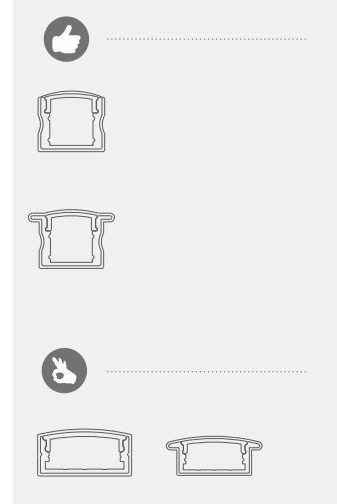

Electrical & Output Data

Model No.	LN-22-3K6K-12V	LN-22-3K6K-24V
Step length (mm/x LED)	25mm / 6LEDs	50mm / 12LEDs
Number LED/m	240	240
Voltage (v)	12 V	24 V
Ra	>90	>90
Beam Angle(°)	120	120
Power (w/m)	22	22
Lumen(lm/m)	1800	1800
FPC width (mm)	10	10
Max. length per circuit (m)	3	3
IP rate	20	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles	

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.