

V-S Led-tukku Oy - LN-38-30M-24V



IP rate



DC 24V




LM 80

Ra 80





5 years

Illuminance Distribution



Dimensions & available lengths

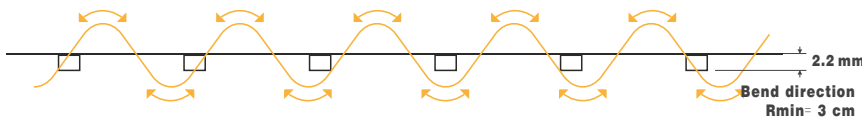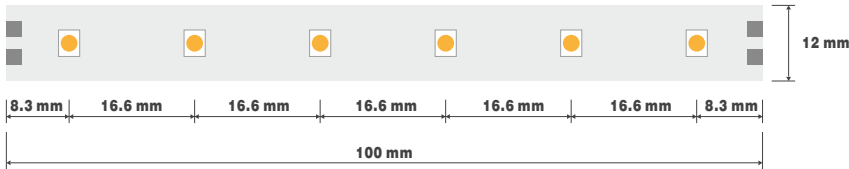

Aluminum Profiles



Electrical & Output Data

Model No.	LN-38-30M-24V
Step length (mm/x LED)	100mm/6LEDs
Number LED/m	72
Voltage (v)	24 V
Ra	80
Beam Angle(°)	120
Power (w/m)	3.8
FPC width (mm)	10
Max. length per circuit (m)	30
IP rate	67
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Light efficiency & Lumen Output

Luminaire efficacy (3000K)	80lm/W @Ra80
LED color	Ra80
3000K	304lm
4000K	310lm