

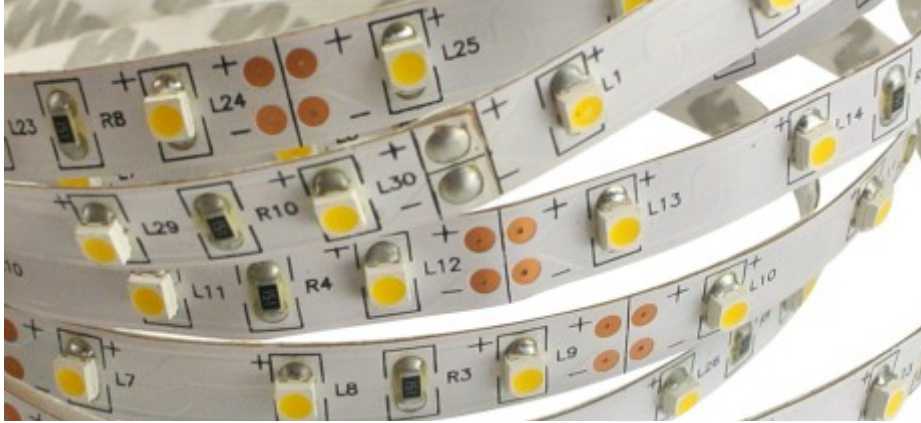


# V-S Led-tukku Oy - LN-38-12V

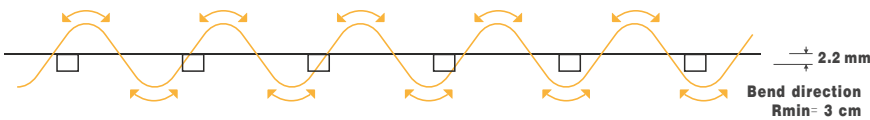

## Dimensions & available lengths

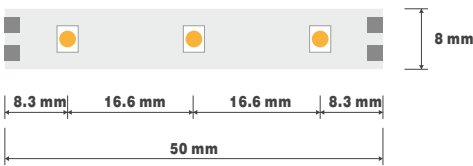


## Electrical & Output Data

<b>Model No.</b>	<b>LN-38-12V</b>
<b>Step length (mm/x LED)</b>	<b>50mm / 3LEDs</b>
<b>Number LED/m</b>	<b>60</b>
<b>Voltage (v)</b>	<b>12 V</b>
<b>Ra</b>	<b>80</b>
<b>Beam Angle(°)</b>	<b>120</b>
<b>Power (w/m)</b>	<b>3.8</b>
<b>FPC width (mm)</b>	<b>8</b>
<b>Max. length per circuit (m)</b>	<b>5</b>
<b>IP rate</b>	<b>20/65</b>
<b>Installation</b>	<b>3M Tape / Mounting Clips / Aluminum Profiles</b>

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.



## Illuminance Distribution

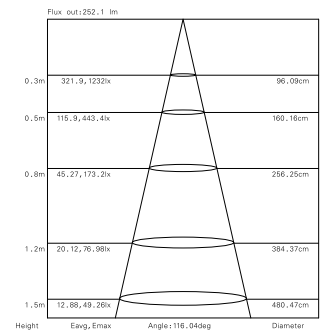

## Aluminum Profiles



## Light efficiency & Lumen Output

**Luminaire efficacy (3000K)** **88lm/W @Ra80**

**LED color** **Ra80**

**3000K** **334lm**

**4000K** **341lm**