


V-S Led-tukku Oy - LN-76-12V





IP rate  IP20



Illuminance Distribution



Dimensions & available lengths

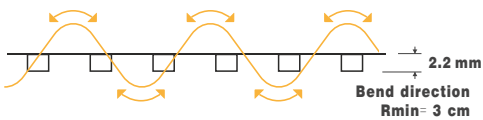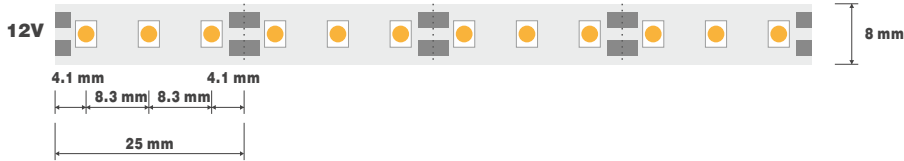

Electrical & Output Data

Model No.	LN-76-12V
Step length (mm/x LED)	25mm / 3LEDs
Number LED/m	120
Voltage (v)	12 V
Ra	80
Beam Angle(°)	120
Power (w/m)	7.6
FPC width (mm)	8
Max. length per circuit (m)	5
IP rate	20
Installation	3M Tape / Mounting Clips / Aluminum Profiles

The electrical data provided on the each product pages are for reference only; the data values are not guaranteed. Specification may be subject to change without announcement.

Aluminum Profiles



Light efficiency & Lumen Output

Luminaire efficacy (3000K)	88lm/W @Ra80
LED color	Ra80
3000K	669lm
4000K	682lm